


Instructions

1. Sew one A square between two B strips. Press in the direction indicated by the arrows. Make 3.




2. Sew the C strips and L strip together into a strip set. Press. Cut into six 3" wide units.




3. Sew the units from steps 1 and 2 into blocks as shown below. Press. Make 3 Present Blocks.




4. Sew D and E together. Press. Cut into four 3" wide units.




5. Sew an F piece to each D/E unit. Press. Make 4.




6. Sew one Present block from step 3 to one unit from step 5 as shown below. Press. Make 2.




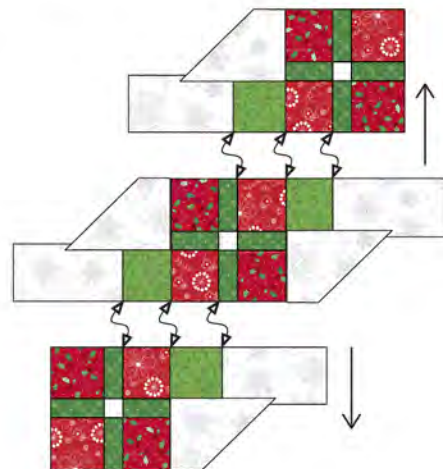
7. Sew one Present Block from step 3 to two units from step 5 as shown below. Press. Make 1.

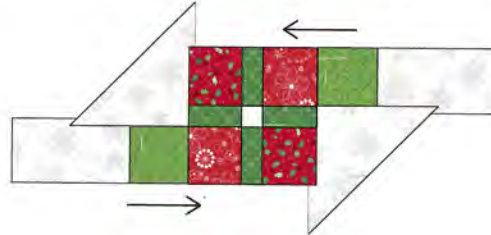


8. Trim the excess from each F triangle, flush with the edge of the Present Blocks.

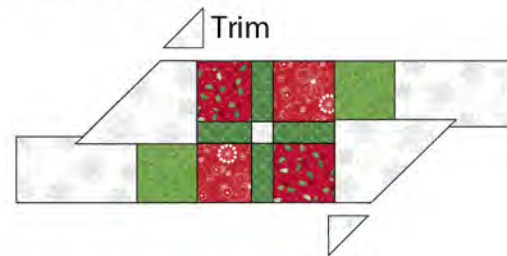


9. The  symbol indicates cross seams from row to row. Using the Present Blocks, line up the cross seams with right sides together. Pin to secure. Sew the rows together. Press.



10. Trim the sides as shown leaving 1/4" from the outer corner of the Present Blocks.

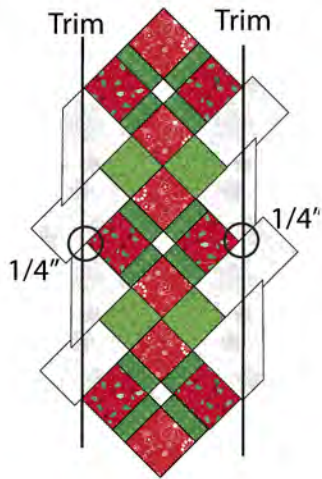

11. Sew one G strip to each long side of the table runner. Trim on each end. Press.

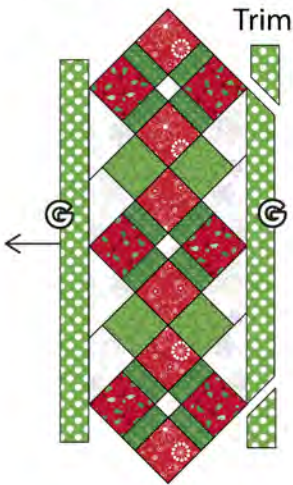

12. Sew two H strips to opposite corners of the quilt as shown below. Press. Sew the two remaining H strips to the other two opposite corners of the quilt as show below. Press. Trim excess.



13. Center the I strip on a long side of the quilt. Pin to secure. Sew I to the quilt. Press. Sew the remaining I strip to the opposite side of the quilt. Press. Trim the excess corners (45 degree angle).



14. Sew a J to opposite corners of the table runner. Press.

15. Sew a K to the remaining opposite corners of the table runner. Press.






16. Trim the excess corners of the K and J strips flush with the long sides of the table runner.



17. Layer the backing (wrong side up), batting and table runner top (right side up). Baste layers to secure.

18. Quilt as desired.

19. Trim the backing and batting flush with the quilt top. Bind the edges using a 3/8" wide seam allowance.

FABRIC	YARDAGE & CUTTING	*Cut WOF unless otherwise stated
	Fabric 1 MAS8247-W 1½ yds (includes backing)	For Borders, Cut: I: Cut (2) 3½" x 25" strips J: Cut (2) 3½" x 18" strips K: Cut (2) 3½" x 20" strips Cut Backing LOF from remaining.
	Fabric 2 MAS8240-WW ¾ yd	E: Cut (1) 7" x 14" strip F: Cut (1) 9" square, cut twice diagonally into (4) triangles A: Cut (3) 1½" squares
	Fabric 3 MAS8241-GG ⅝ yd	B: Cut (6) 1½" x 3" strips L: Cut (1) 1½" x 20" strip
	Fabric 4 MAS8248-R ½ yd (includes binding)	C: Cut (1) 3" x 20" strip Binding: Cut (3) 2½" x WOF strips
	Fabric 5 MAS8246-R ⅛ yd	C: Cut (1) 3" x 20" strip
	Fabric 6 MAS8243-GG ⅛ yd	D: Cut (1) 3" x 14" strip
	Fabric 7 MAS8216-G ¼ yd	G: Cut (2) 2" x 22" strips H: Cut (4) 2" x 16" strips

Jingle all the way! by Kim Christopherson

KIMBERBELL
basics by Kim Christopherson

*WOF = Width Of Fabric
 LOF = Length Of Fabric

MAYWOOD  **STUDIO**